




This document is the property of Nian-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nian-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

# CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Fido Veng	25/08/09*	
B	RETABLE P/N	Fido Veng	23/08/13*	
C				

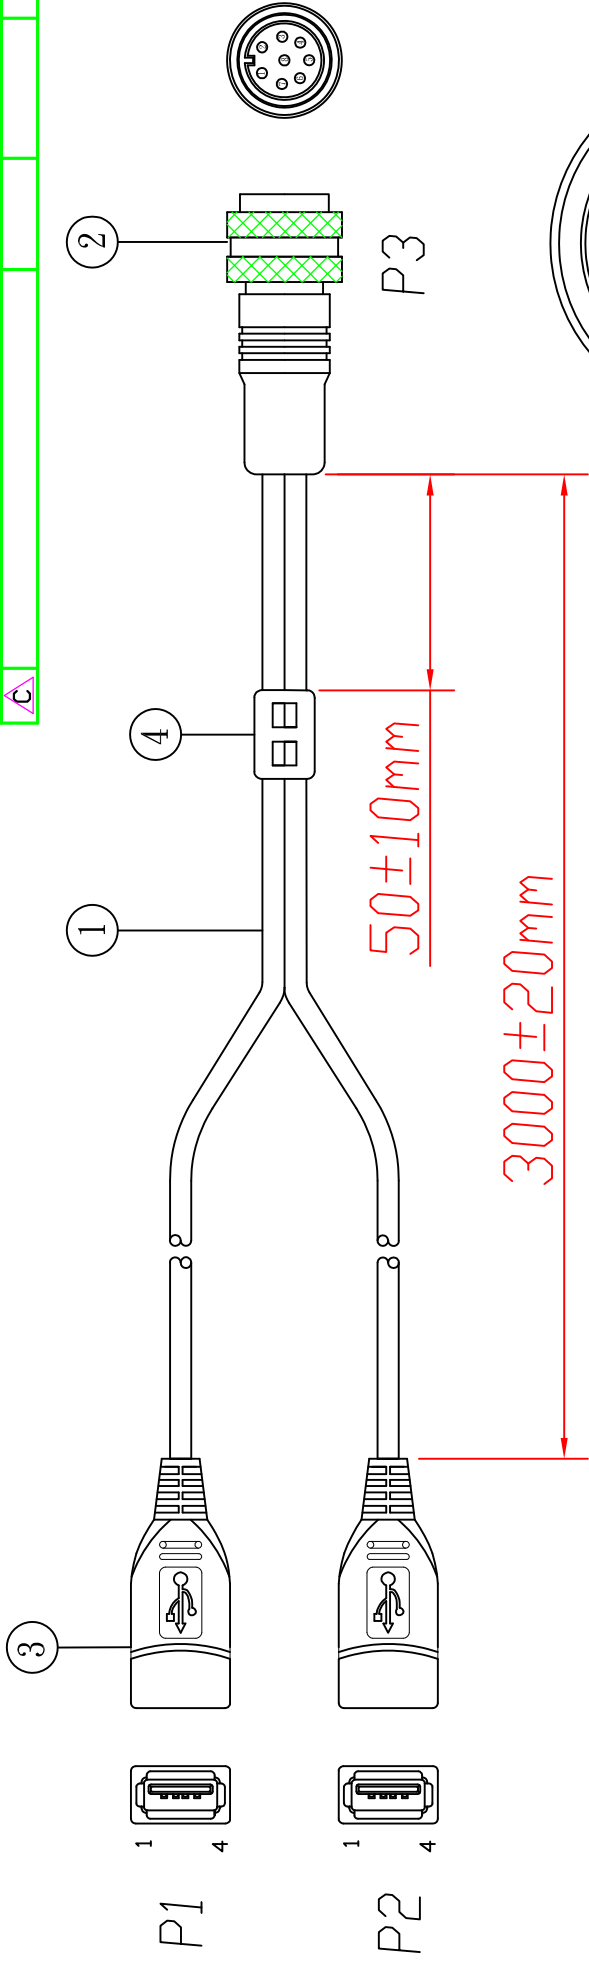


## \*\*WIRE CONNECTION\*\*

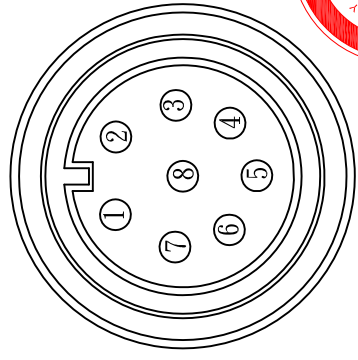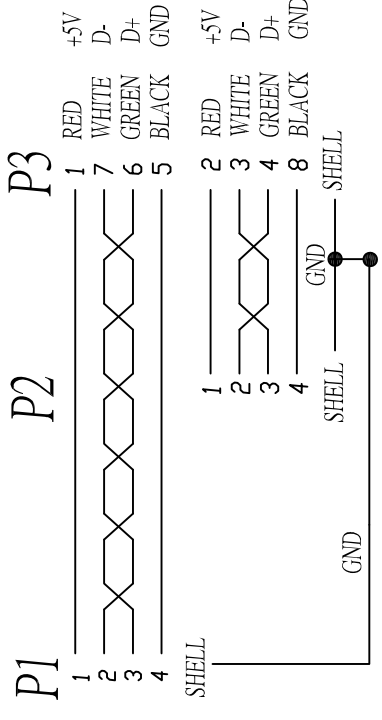

P3  
Pin Assignments  
Front View

4	STRAIN RELIEF(COLOR:BLACK PVC45%)
3	CONNECTOR:USB A TYPE
2	CONNECTOR:M12-8P(Female WP-08F2-42)
1	UL2725 24AWG*2C+28AWG*1P+AEB OD:4.5mm COLOR:BLACK
ITEM	DESCRIPTION:

TOLERANCE	±0.20	mm	UNIT	Fido Veng	APPEND	Jen Xie	DRAWN
.x	±0.10		SCALE	1:1	Emilly Suen	CHOKED	
.xx	±0.05						
.xxx	±0.03						
.xxxx	ANGULA ±1°						
<p>包裝注意事項:                  **單PCS 包裝並貼上料號標籤**                  客戶料號: 32001-001000-100-RS</p>							
TITLE		M12-8P(Female) / USB A (Female) #2		PART NO.		QC4404	
DESCRIPTION:		CB-0119		DWG NO.		D.C.	
SHEET		1		VERSION		B	



TOLERANCE	±0.20	mm
.x	±0.10	
.xx	±0.05	
.xxx	±0.03	
.xxxx	ANGULA ±1°	