

Note:

1. Material: SECC
2. Thickness: 1.0mm
3. Surface treatment: Black C 全烤(细织纹).
4. Break all sharp edges & corners free from burrs. finished part must be free of all deburring shavings and particles.
5. Nut & Standoff must be precisely firmed.
6. Unspecified radius is R=2mm.
7. Nuspecified internal radius is R=0.5mm.
8. (A)~(C) are critical dimensions.

Note:

The componet should be comply with the prohibit of hazardous substances in the Halogen Directive.


管制物质(Control substance)	浓度限值 Concentration limit
氯(Cl)	<900ppm
溴(Br)	<900ppm
溴(Br)+ 氯(Cl) 总卤素	<1500ppm

Note:

The componet should be comply with the prohibit of hazardous substances in the HSF Directive.

Hazardous Substances (管制物质)	Threshold (浓度限值)
Cd(镉)	<100ppm
Pb(铅)	<1000ppm
Hg(汞)	<1000ppm
Cr6+(六价铬)	<1000ppm
PBB(多溴联苯)	<1000ppm
PBDE(多溴联苯醚)	<1000ppm
DEHP(邻苯二甲酸二(2-乙基己基)酯)	<1000ppm
BBP(邻苯二甲酸丁基酯)	<1000ppm
DBP(邻苯二甲酸丁酯)	<1000ppm
DIBP(邻苯二甲酸二异丁酯)	<1000ppm

RANGE	Common	APPROVE	Mark Wang	2023.06.27	Armorlink Electronics Inc.
(mm)	Tolerance	CHECK	Mark Wang	2023.06.27	
0~25	±0.10	DESIGN	Jie Yang	2023.06.27	TITLE Wall mount
25~80	±0.15	DRAWN	Jie Yang	2023.06.27	
80~200	±0.20	UNIT:mm		SCALE:1:1	MODEL DRPC-242-ADL-P-R10
200~400	±0.30	SIZE: A3			
400~	±0.40	FILE NO: 41020-0578C2-00-HF		PART NO: 41020-0578C2-00-HF	
ANGLE	±1°				

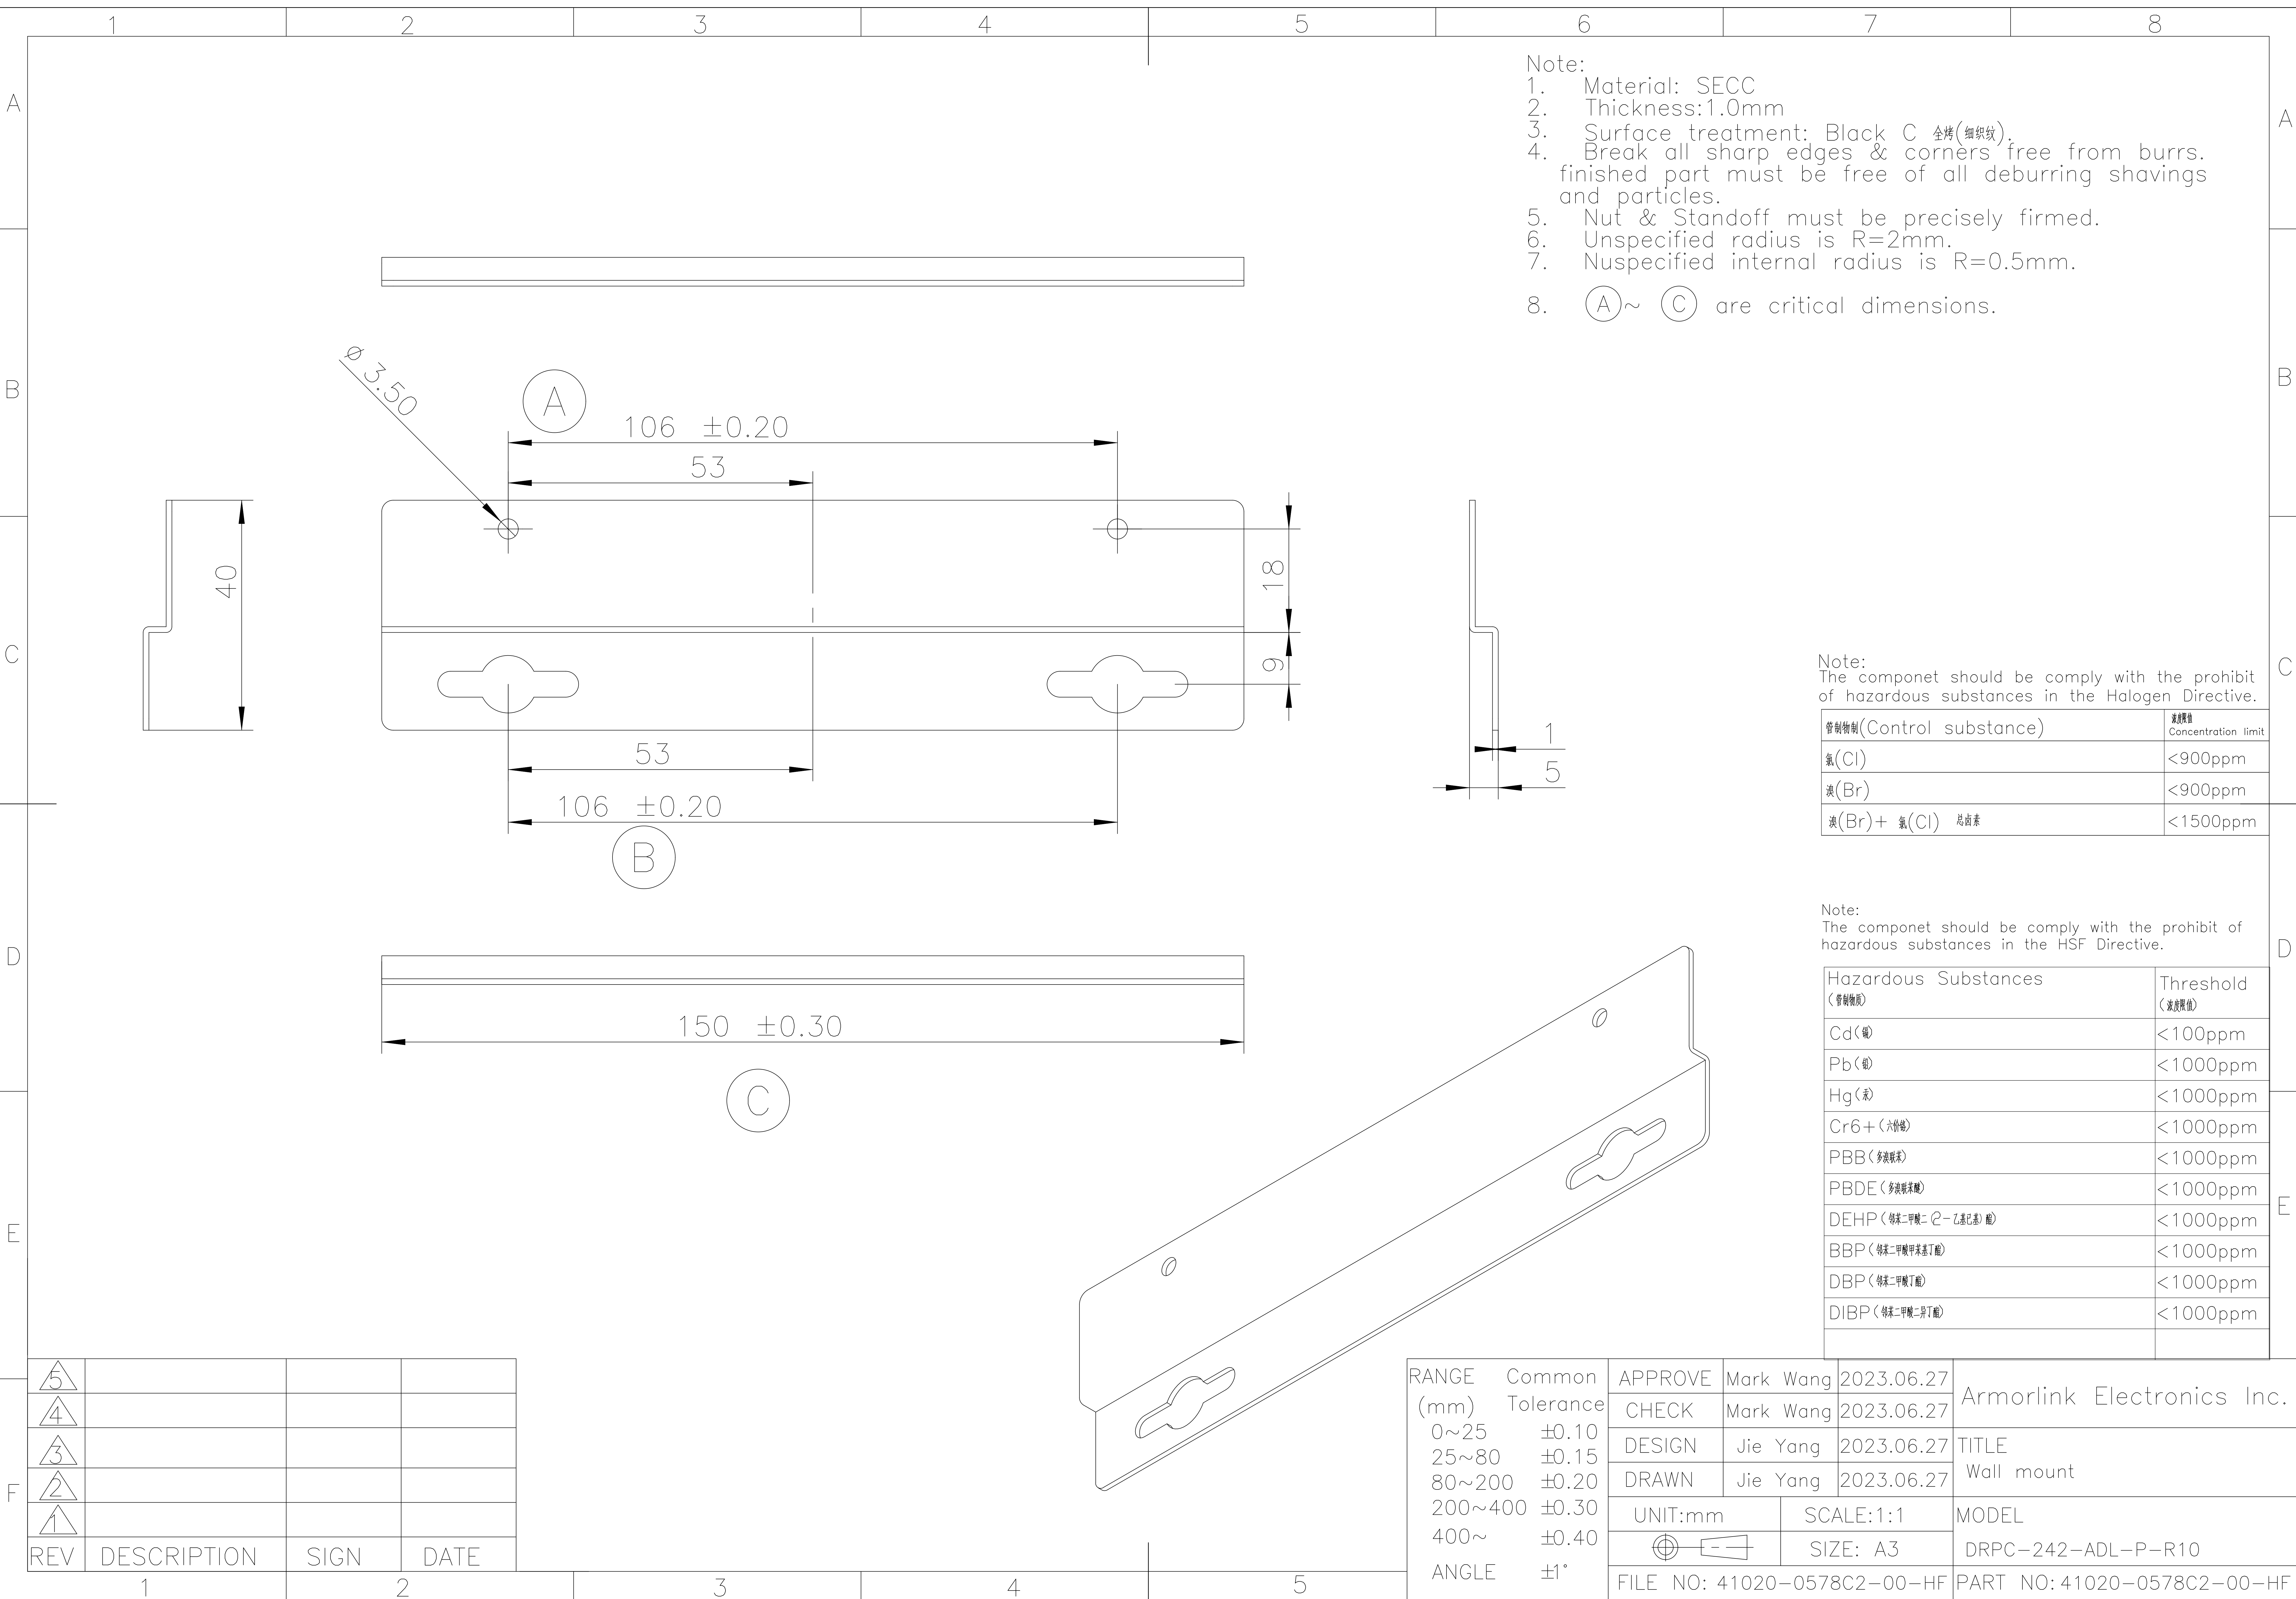

REV	DESCRIPTION	SIGN	DATE
5			
4			
3			
2			
1			