


1 2 3 4 5 6

D
C
B
A

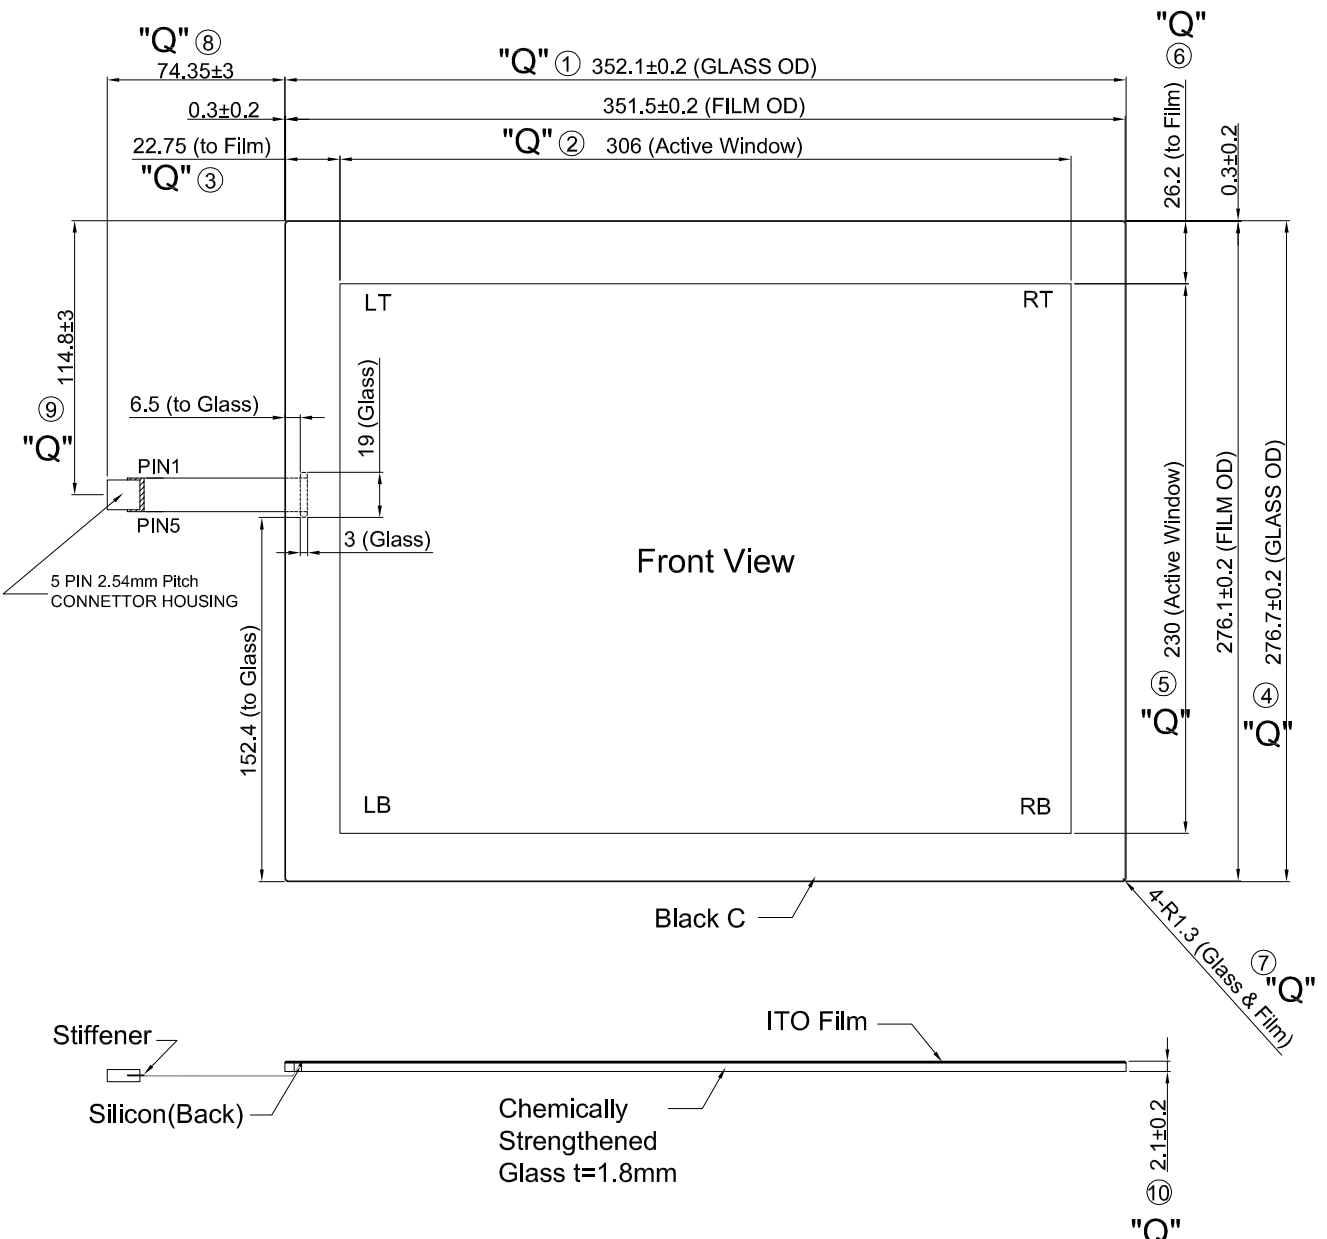

1. TOUCH PANEL PIN ASSIGNMENT

PIN NO.	Designation
1	RT
2	LT
3	SENSE
4	LB
5	RB

2. MATERIAL CHARACTERISTICS

Property	Requirement
Surface treatment	Anti-Glare
Light transmission	80±3%
Operation temperature	-20~70° C
Storage temperature	-20~70° C
Operating Humidity	20~90%RH
Storage Humidity	20~90%RH
Surface hardness	≥3H

3.Tolerance no specified: ±0.3mm

4.Mark "Q"- part of measurement

SYMBOL	DATE	REVISED DESCRIPTIONS	NOTE	CUSTOMER APPROVED	MILDEX OPTICAL INC.			DWG-NO	1505050-D03.1														
D03.1	2018.08.01	Changed material characteristics · Cancel adhesive			<table border="1"> <tr> <td>APPROVED</td> <td>CHECK</td> <td>DRAWN</td> </tr> <tr> <td>劉子德</td> <td></td> <td>李軒漢</td> </tr> </table>			APPROVED	CHECK	DRAWN	劉子德		李軒漢		<table border="1"> <tr> <td>SCALE</td> <td>---</td> </tr> <tr> <td>UNIT</td> <td>mm</td> </tr> <tr> <td>DATE</td> <td>2018.08.01</td> </tr> <tr> <td>SHEET NO.</td> <td>1 / 1</td> </tr> </table>	SCALE	---	UNIT	mm	DATE	2018.08.01	SHEET NO.	1 / 1
APPROVED	CHECK	DRAWN																					
劉子德		李軒漢																					
SCALE	---																						
UNIT	mm																						
DATE	2018.08.01																						
SHEET NO.	1 / 1																						
D02.4	2018.05.30	修改背膠材料與整體厚度&環境特性																					
D02.3	2018.04.16	修改背膠材料與整體厚度																					
D02.2	2018.02.08	修改背膠材料與整體厚度																					
D02.1	2018.02.02	修改背膠材料與整體厚度																					
D01.1	2017.08.09	news																					

1 2 3 4 5 6