


AC-KIT-888S

Realtek ALC888S 7.1 Channel HD Audio Peripheral Board, RoHS

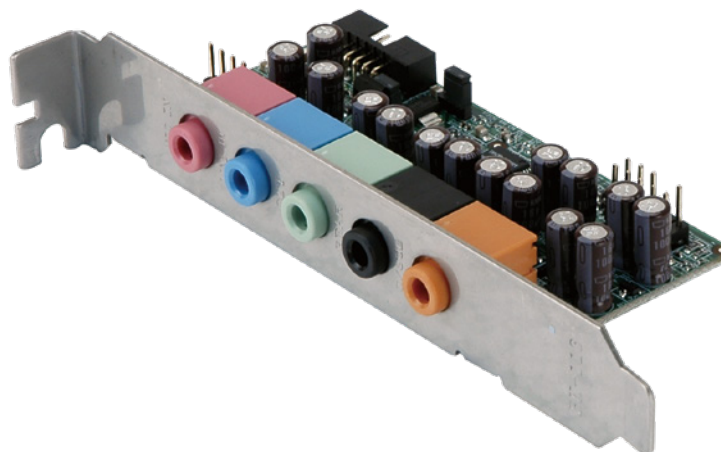

Features

- Realtek ALC888S HD Audio codec IC supported
- Five audio jacks for microphone, 7.1+2-channel high definition audio input and output
- High performance 7.1+2-channel high definition audio board provides 7.1-channel sound playback and multiple streaming through the front panel stereo outputs
- Digital to Analog Converter (DAC) with 97dB Signal to Noise Ratio (SNR)
- Analog to Digital Converter (ADC) with 90dB Signal to Noise Ratio (SNR)
- All the Digital to Analog Converter (DAC) supports 44.1k/48k/96k/192kHz sampling rate
- All the Analog to Digital Converter (ADC) supports 44.1k/48k/88.2k/96k/192kHz sample rate
- Driver supports Windows® 2000/2003/XP/Vista/7/10 (32/64 bits) and Linux (Ubuntu or Debian)
- CE/FCC compliant

Ordering Information

AC-KIT-888S-R10	Realtek ALC888S 7.1 Channel HD Audio peripheral board, RoHS
32107-001100-100-RS	Audio cable with length of 200 mm, 2x5 pin, pitch=2.0 mm

Packing List

1 x AC-KIT-888S audio peripheral board	
1 x Audio cable	1 x QIG

Dimensions (Unit: mm)

