



## Main Features

- ♦ Onboard Intel® Pentium® processor N3700 quad core, 1.6GHz
- ♦ 3 x display output: 1 x HDMI display + 1 x DVI-D + 1x DP port
- ♦ 2 x Intel I210AT LAN ports support WoL, Teaming and PXE
- ♦ 4 x USB 3.0

- ♦ 4 x COM ports with RS232, 2 x COM port with RS422/485
- ♦ 1 x optional interface for optional Wi-Fi/3.5G/LTE modules
- ♦ Support -5°C~55°C extended operating temperature
- ♦ Support 9~30V DC input

## Product Overview

Powered by the latest generation of Intel® Pentium processor N3700 Quad core, 1.6GHz (formerly codenamed "Braswell"), NISE 106-N3700 presents intelligent PC-based controller and IOT gateway for factory automation. Up to 4G on board DDR3L memory, The NISE 106-N3700 support operating temperature from -5 up to 55 degree C with typical DC input 9~30V. The NISE 106-N3700 has high integration ability with optional Mini PCIe module and 4 x COM ports which makes it a reliable connection with devices in factory automation applications, IOT applications (with optional GbE LAN, Wi-Fi, 3.5G/4G LTE module) and communication applications (with optional GPIO, RS232/422/485). NISE 106-N3700 is definitely the top choice for M2M intelligent system as a factory automation controller and gateway.

## Specifications

### CPU Support

- ♦ Onboard Intel® Pentium® processor N3700 quad core, 1.6GHz
- ♦ Support Intel® Pentium®/Celeron® N3000 processor family from dual core N3000/N3050 and quad core N3150/N3700 with difference SKUs.

### Main Memory

- ♦ 1 x DDR3L SO-DIMM socket, support DDR3L 1600/1333 4GB RAM max., un-buffered and non-ECC

### Display Option

- ♦ 1 x HDMI + 1 x DVI-D + 1 x DP display port

### I/O Interface-Front

- ♦ ATX power on/off switch
- ♦ 1 x Power status/1 x HDD access/1 x battery low/1 x programing/ 4 x Tx/Rx LEDs
- ♦ 2 x Intel® I210AT GbE LAN ports, support wake on LAN, Teaming and PXE
- ♦ 1 x HDMI + 1x DVI-D display output
- ♦ 4 x USB 3.0 (900mA per each)
- ♦ 1 x 3-pin DC input, support +9 to 30VDC input

### I/O Interface - Rear

- ♦ 1 x DP display output
- ♦ 1 x SIM Card holder
- ♦ 1 x external CFast socket

- ♦ 4 x DB9 for COM1~COM4, COM1 and COM2 support RS232/422/485 with auto flow control, COM3 and COM4 only support RS232
- ♦ 2 x Antenna holes for optional Wi-Fi/3.5G antenna
- ♦ 1 x remote power on/off switch
- ♦ 1 x optional I/F for optional Mini PCIe Wi-Fi/3.5G/LTE/NEXCOM's automation module output

### I/O Interface - Internal

- ♦ 1 x GPI and 4 GPO (5V, TTL type)

### Storage Device

- ♦ 1 x 2.5" HDD (SATA3.0)

### Expansion Slot

- ♦ 1 x Mini PCIe socket for optional Wi-Fi/4G LTE/3.5G modules


### Power Requirement

- ♦ Power input: +9 to 30 Vdc
- ♦ 1 x optional 24V, 60W power adapter

### Support OS

- ♦ Windows 7
- ♦ Windows 8.1
- ♦ Windows Embedded Standard 7
- ♦ Windows Embedded Standard 8
- ♦ Android 4.4

## Dimension Drawing

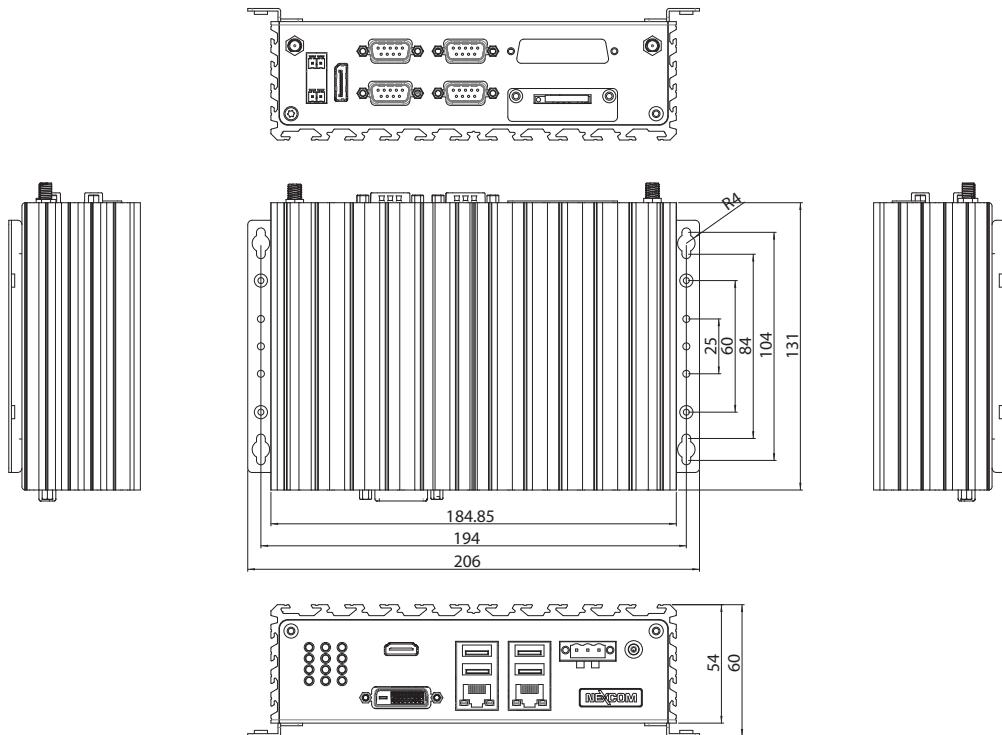

### Dimensions

- 185mm (W) x 131mm (D) x 54mm (H) without wall-mount bracket

### Construction

- Aluminum and metal chassis with fanless design

### Environment

- Operating Temperature:  
Ambient with air flow: -5°C to 55°C  
(according to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14)
- Storage temperature: -30°C to 85°C
- Relative Humidity: 10% to 95% (non-condensing)
- Shock protection:
  - HDD: 20G, half sine, 11ms, IEC60068-27
  - CFast: 50G, half sine, 11ms, IEC60068-27
- Vibration protection w/HDD condition:
  - Random: 0.5Grms @ 5~500 Hz, IEC60068-2-64
  - Sinusoidal: 0.5Grms @ 5~500 Hz, IEC60068-2-6
- Vibration protection w/CFast & SSD condition:
  - Random: 2Grms @ 5~500 Hz, IEC60068-2-64
  - Sinusoidal: 2Grms @ 5~500 Hz, IEC60068-2-6

### Certifications

- CE
- FCC Class A

## Ordering Information

- **NISE 106-N3700 (P/N: 10J00010600X0)**  
Intel® Pentium® processor N3700 quad core, 1.6GHz fanless system
- **24V, 60W AC/DC power adapter w/o power cord (P/N: 7400060024X00)**
- **Optional Wi-Fi/GSM module (P/N: BW00000037X00)**