

# Getac

Rugged Mobile Computing Solutions

# V110


## Fully Rugged Convertible Notebook



- Enhanced Enterprise Security with optional Intel vPro, Windows Disk Encryption, TPM 2.0 and many more multi-factor authentication options
- 6th Generation Intel® Core™ i7 / i5 vPro™ Processor
- 11.6" LumiBond® 2.0 Display with Getac Sunlight Readable Technology and Capacitive Touchscreen
- LifeSupport™ battery swappable technology
- Optional Dual Mode Touchscreen. (multi-touch and digitizer)
- Reliable, Speedy Solid-State Driver Storage



Office Dock

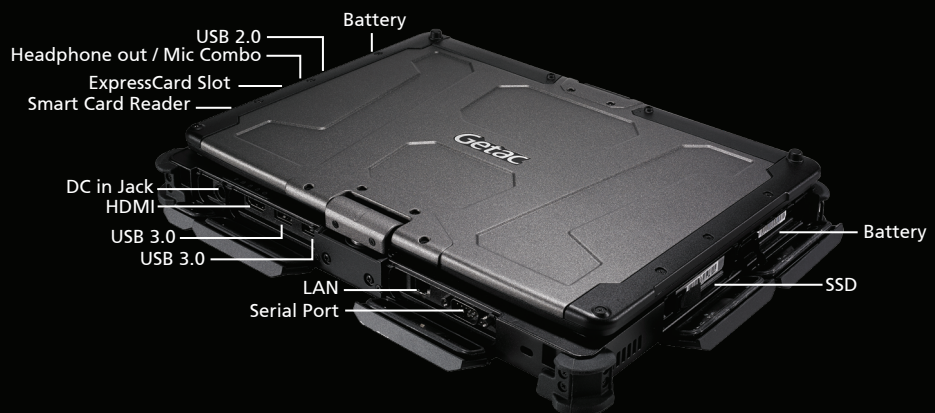

Rugged Mobile Computing Solutions



## Specifications

<b>Model Name</b>	V110 G3	<b>Communication Interface</b>	10/100/1000 base-T Ethernet Intel® Dual Band Wireless-AC 8260; 802.11ac Bluetooth (v4.2) <sup>i</sup> Optional dedicated GPS Optional Gobi™ mobile broadband
<b>Operating System</b>	Windows 10 Professional Windows 7 Professional	<b>Software</b>	Getac Utility Getac Camera Getac Geolocation Adobe® Reader®
<b>Mobile Computing Platform</b>	Intel® Core™ i7 Technology Intel® Core™ i7-6500U Processor 2.5GHz Max. 3.1GHz with Intel® Turbo Boost Technology - 4MB Intel® Smart Cache  Intel® Core™ i7 vPro™ Technology Option Intel® Core™ i7-6600U vPro™ Processor 2.6GHz Max. 3.4Hz with Intel® Turbo Boost Technology - 4MB Intel® Smart Cache  Intel® Core™ i5 Technology Intel® Core™ i5-6200U Processor 2.3GHz Max. 2.8GHz with Intel® Turbo Boost Technology - 3MB Intel® Smart Cache  Intel® Core™ i5 vPro™ Technology Optional Intel® Core™ i5-6300U vPro™ Processor 2.4GHz Max. 3.0GHz with Intel® Turbo Boost Technology - 3MB Intel® Smart Cache	<b>Security Feature</b>	Option Intel® vPro™ Technology TPM 2.0 Optional RFID and contactless Smart Card reader <sup>ii</sup> Option fingerprint scanner Kensington lock
<b>VGA Controller</b>	Intel® HD Graphics 520	<b>Power</b>	AC Adapter (65W, 100-240VAC, 50/60 Hz) Li-Ion battery (11.1V, 2100mAh) x 2 (up to 13 hours of battery life) <sup>iii</sup>
<b>Display</b>	11.6" TFT LCD HD (1366 x 768) 800 nits LumiBond® display with Getac sunlight readable technology Capacitive multi-touch screen	<b>Dimension (W x D x H) &amp; Weight</b>	299 x 223 x 34 mm (11.77" x 8.78" x 1.34"), 1.98 Kg (4.36 lbs) <sup>iv</sup>
<b>Storage &amp; Memory</b>	4GB DDR4 expandable to 16GB SSD 128GB / 256GB / 512GB	<b>Rugged Feature</b>	MIL-STD-810G certified and IP65 certified MIL-STD-461F certified <sup>v</sup> Optional ANSI/ISA 12.12.01 Optional MIL-STD-810G Salt fog certified Vibration & drop resistant e4 Mark certified for vehicle usage
<b>Keyboard</b>	LED backlit membrane keyboard Optional Rubber Keyboard	<b>Environmental Specification</b>	Temperature <sup>vi</sup> : - Operating: -21°C to 60°C / -5.8°F to 140°F - Storage: -40°C to 71°C / -40°F to 160°F Humidity: - 95% RH , non-condensing
<b>Pointing Device</b>	Touchscreen - Capacitive multi-touch screen - Optional dual mode touchscreen (multi-touch and digitizer) Touchpad - Glide touchpad with multi-touch	<b>Optional Accessories</b>	Carry bag Battery charger Multi-Bay Charger (Eight-Bay) Vehicle adapter (90W, 11-16VDC and 22-32VDC) MIL-STD-461F certified AC adapter (90W, 100-240VAC) Digitizer Pen Capacitive Stylus (Hard-tip) Protection film X strap Shoulder strap (2-point) Hard Handle Main battery (11.1V, 2100mAh) AC adapter (65W, 100-240VAC) Vehicle dock Office dock
<b>Expansion Slot</b>	ExpressCard/54 x 1 Smart Card reader x 1		
<b>I/O Interface</b>	FHD webcam x 1 Serial port (9-pin; D-sub) x 1 Headphone out / mic-in Combo x 1 DC in Jack x 1 USB 3.0 (9-pin) x 2 USB 2.0 (4-pin) x1 LAN (RJ45) x 1 HDMI x 1 Docking connector (24-pin) x 1 Optional 8M pixels auto focus rear camera x1 Optional RF antenna pass-through for GPS, WLAN and WWAN		

### Docking Solutions

	Serial Port	External VGA	Microphone	Audio Output	DC in Jack	USB	LAN	HDMI	RF Antenna Connector (GPS, WWAN, WLAN)
Vehicle Dock	2	1	1	1	1	4	1	1	3
Office Dock	2	1	1	1	1	4	1	1	--

<sup>i</sup> Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.  
<sup>ii</sup> 13.56MHz Contactless RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FelCa™ compliant).  
<sup>iii</sup> Battery life testing conducted under MobileMark 2007. Battery performance will vary upon software applications, wireless settings, power management settings, LCD brightness, customized modules and environmental conditions. The battery has a limited number of charge cycles and may eventually need to be replaced by a Getac service provider. Battery life and charge cycles vary by use and settings.  
<sup>iv</sup> Weight varies from configurations and optional accessories.  
<sup>v</sup> MIL-STD-461F 90W AC adapter sold separately.  
<sup>vi</sup> Tested by a national independent third party test lab following MIL-STD-810G.



### Getac Technology Corporation

5F, Building A, No. 209, Section 1, Nangang Rd., Nangang Dist., Taipei City, 11568, Taiwan, R.O.C.  
 Tel: +886 2 2785 7888  
 globalmarketing@getac.com  
 www.getac.com

